

LG Duct-Free Split Systems Product Overview





TABLE OF CONTENTS


| COMPANY INTRODUCTION | |
|---------------------------------------|-----|
| Introduction | 4 |
| DUCT FREE SYSTEM | |
| Introduction | 6 |
| Key Features | 8 |
| DUCT-FREE SPLIT: SINGLE ZON | JE_ |
| Introduction | 12 |
| Art Cool™ Premier | 13 |
| Art Cool™ Gallery | 13 |
| Art Cool™ Mirror | 14 |
| High-Efficiency Standard Inverter | 15 |
| Standard Inverter | 15 |
| Mega Standard | 16 |
| Four-Way Ceiling Cassette | 17 |
| Ceiling-Concealed Duct (High Static) | 17 |
| DUCT-FREE SPLIT: MULTI ZONE | |
| Introduction : Multi F Outdoor Units | 18 |
| Outdoor Unit Heat Pump Inverter | 19 |
| Introduction : Multi F Indoor Units | 20 |
| Art Cool™ Gallery Inverter | 21 |
| Art Cool™ Mirror | 21 |
| Standard | 21 |
| Ceiling-Concealed Duct (Low Static) | 22 |
| Ceiling-Concealed Duct (High Static) | 22 |
| Four-way Ceiling-Cassette | 23 |
| Vertical-Horizontal Air Handling Unit | 23 |
| FEATURES CHART | |
| Chart | 24 |

LG ELECTRONICS AIR CONDITIONING AND ENERGY SOLUTIONS COMPANY

FROM AIR CONDITIONERS AND HOME APPLIANCES TO MOBILE PHONES AND COMPUTER ACCESSORIES, LG ELECTRONICS GIVE YOU WHAT YOU NEED TO BE PLUGGED IN, CONNECTED, AND IN CONTROL.

LG Electronics Air Conditioning and Energy Solutions (LG AE) is a total heating, ventilation and air conditioning (HVAC) and energy solution company, providing a full lineup of products including Residential Air Conditioning (RAC), Commercial Air Conditioning (CAC), and Building Management Systems (BMS) in markets around the world. Based on technological leadership and a commitment to environmental responsibility, LG AE designs and manufactures some of the most advanced, energy efficient products available. Through innovation and deep investments in effective marketing strategies, LG AE has evolved into a total solution provider.



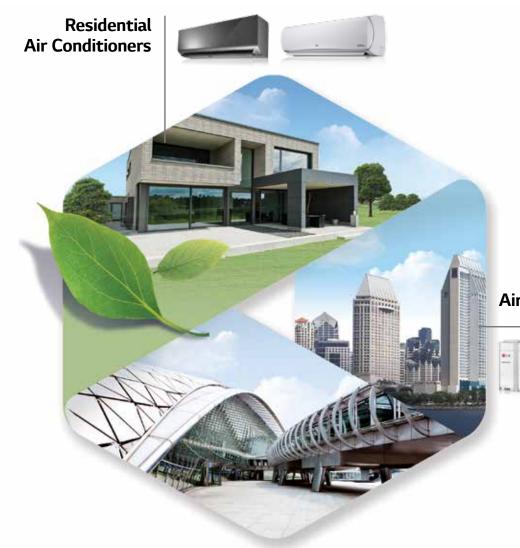

Commercial Air Conditioners









HOW IT WORKS

A DFS system is simply a reconfiguration of a traditional central air conditioner, consisting of an outdoor inverter-driven compressor / condenser unit, one or more indoor evaporator units, and a compact conduit for refrigerant piping and wiring. Instead of using one indoor evaporator coil / air handler to move cooled or heated air through ductwork as central air conditioners do, the indoor evaporator units are installed directly in each room. Because the indoor units deliver conditioned air directly into the room, the need for complicated ductwork is removed, and energy losses from air traveling through ductwork are reduced. And because each indoor unit has its own thermostat and controller, temperatures can be customized for each room.

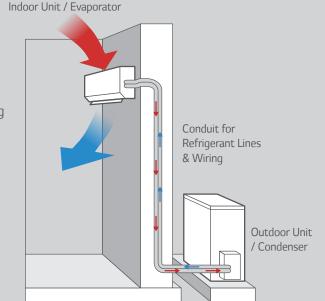

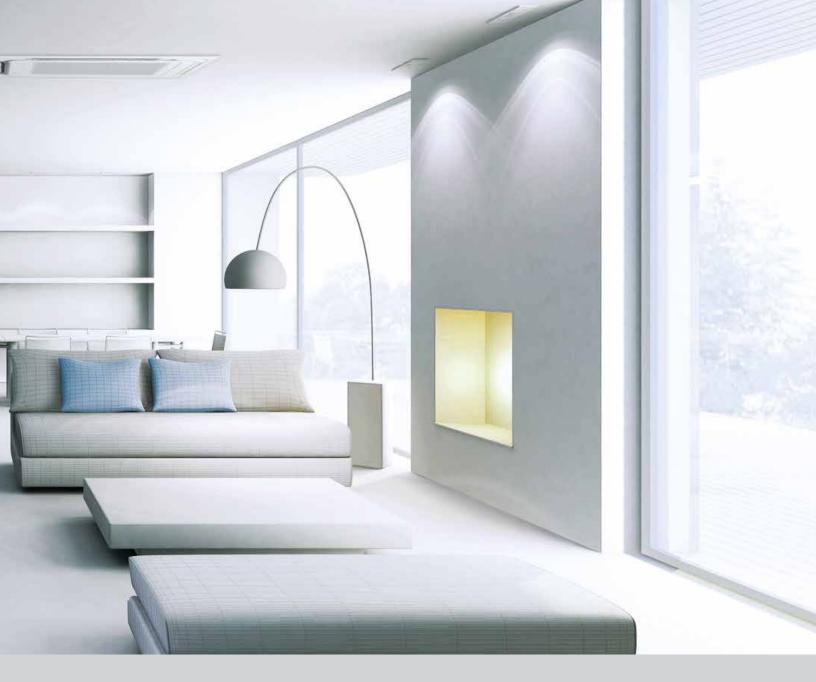



ROOM BY ROOM CONTROL

LG air-conditioning systems provide more consistent temperatures, and offer smart solutions for cooling and heating to single rooms and additions. With individual controllers for each indoor unit, better room by room control can be achieved.



QUIET & EFFICIENT TECHNOLOGY

Inverter technology allows the system to "coast," therefore, minimal energy is used. Energy-efficient Inverters also offer personalized comfort, and operate quietly and efficiently.



3M[™] Micro protection filters reduce dust and microscopic particles including pollen, pet dander and odors.



INSTALLATION

Make your home more comfortable with quick and easy installation of LG air conditioning systems.

KEY FEATURES: COMFORT SOLUTIONS



PRECISE TEMPERATURE CONTROL


LG's revolutionary Inverter technology boasts a powerful, yet, quiet performance, while minimizing energy consumption. With world-class energy efficiency and a controller for every indoor unit, enjoy comfortable surroundings while saving energy.





QUIET OPERATION

LG air conditioners operate at low sound levels, thanks to LG's unique low vibration compressor, skew fan and brushless direct current (BLDC) motor technology that eliminates unnecessary noise and allow for smooth operation.

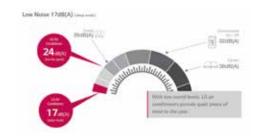

Skew Fan

By minimizing the surface pressure of the fan blade in contact with air, interference and peak noise are reduced to a level that is among the lowest in the world.




Conventional

Skew Fan

BLDC Fan Motor

With strong torque and powerful magnetism inside the rotor, the BLDC motor provides large air volume and high static pressure.



AC Motor


- Low efficiencyOverhaul heat
- problem
 Difficult precise speed control

BLDC Motor

- Low electrical and mechanical sound
- Precise speed control
- Durable

Low Vibration Compressor

The design of a twin rotary compressor helps to reduce vibration. A twin rotary compressor also applies a double cam to reduce torque variation—a reduction of more than 40% when compared to a single rotary compressor.



Single Rotary

Twin Rotary

The balanced stability of twin rotary compressor keeps the vibration to a minimum.

Q

IMPROVED AIR QUALITY

The filtration system of LG air conditioner is unique in design and certified by world-renowned institutes. It works as an invisible grid that provides clean and reliable air to the homeowner.

Self-Cleaning Indoor Coil

Air conditioner self cleans the heat exchanger, maintaining the interior of the indoor unit and eliminating unwanted mold and odors.



MiCRO Dust Filter

Powered by 3M Tech

3M[™] Micro Protection Filter, a high air flow filter, collects microscopic substances like pollen and fine dust.

LG's Standard Air Filter

The first filter that captures dust particles more than 10µm in size.





9

EASY INSTALLATION

LG air conditioners are designed for easier and more efficient installation, regardless of the surroundings. By reducing the number of contractors and time required, it is now possible to install an air-conditioning system in a shorter amount of time.

Perfect Finish

The extra deep frame on some indoor units is large enough to completely enclose the piping assembly and wiring, allowing for a cleaner appearance.



Conventional



LG

Wider Piping Connection Space


The space provided for the piping connections is larger than some competitors, which facilitates the whole installation process.



Conventional


Improved Installation Plates

LG's updated installation plate for some indoor units is larger and is designed to reduce installation time.



Detachable Bottom Cover


On most LG wall-mounted indoor units, The bottom cover is detachable, making installation and maintenance easier.



Installation Support Clip

Support clips ensures adequate space between wall and unit for easier installation.

LG



KEY FEATURES



STYLISH DESIGN

Attractive, Customizable Indoor Units

Art Cool[™] indoor units offer many options that compliment any decor. Art Cool[™] Gallery includes a panel that works like a picture frame—any art or photograph can be displayed. Other Art Cool[™] indoor units are available in styles and finishes that suit any room.





OPTIMIZED AIR FLOW

Jet Cool / Jet Heat

Jet Cool Jet Heat

Operates at a high speed for up to 30 minutes to quickly cool a room. Operates at a high speed for up to 30 minutes to quickly heat a room.



Swirl Wind

Four-way controlled louvers and fan speeds create a stronger, wider air flow and reduce temperature stratification.



Auto Operation

Provides three levels of comfort from which to choose. Temperature and fan speed is set automatically.



Chaos Wind

Chaos wind controls air direction and air speed in three steps—fast, slow and stop—to provide a more natural air circulation.



Art Cool™ Gallery 3D Air Flow

Three-directional air flow creates a more natural air circulation.





DEHUMIDIFYING MODE

Sensors in the indoor unit accurately measure room temperature and control humidity by adjusting the set point and fan speed.





DEFROST CONTROL

Shuts down the indoor fan to prevent cold air from being blown into the house. Removes frost from outdoor coil when the outdoor temperature is low.





AUTO SLEEP MODE

Automatically increases the temperature setting 2° F twice in 30 minute increments. The indoor unit shuts off when the timer setting is reached.





AUTO RESTART

Automatically restarts the system after a power failure.





GOLD FIN™

The Gold Fin™ coating protects the surface of the heat exchanger from corrosion and unnecessary wear.





DUCT-FREE SPLIT : SINGLE ZONE

There's no need to compromise when it comes to comfort.

LG Duct-Free Split Single-Zone Inverter systems provide a smart alternative to both central HVAC and window-mounted air conditioners, and are available in a variety of configurations to suit different cooling and heating situations—zones in residential and small office buildings. Installation by a qualified HVAC contractor is safe and easy—little to no duct work or sheet metal is required.

Duct-Free Split single-zone systems offer many styles of indoor units to enhance any decor, plus performance that lets you enjoy every room to the fullest. And they're available in a full range of capacities to perfectly match any size space, large or small. Whether you need cooling or heating, LG offers the perfect Duct-Free Split performance package.

Art Cool™ Premier

LG Art Cool™ Premier Systems are among the industry's best air conditioning units, offering one of the most complete air conditioning units, offering the user an edge with advanced control and design flexibility.





9,000 BTU/h

LA090HYV (Heat Pump)

- © 9,000 BTU/h Cooling
- H 11,000 BTU/h Heating

12,000 BTU/h

- **LA120HYV (Heat Pump)** 12,000 BTU/h Cooling
- H 13,600 BTU/h Heating





SPECIFICATIONS

| System Model | LA090HYV | LA120HYV | |
|------------------------|---------------------|-----------------|--|
| Indoor Model | LAN090HYV | LAN120HYV | |
| Outdoor Model | LAU090HYV LAU120HYV | | |
| Performance | | | |
| Rated Capacity (BTU/h) | © 9,000 | 12,000 | |
| | H 11,000 | H 13,600 | |
| SEER | 27.5 | 25.5 | |
| HSPF | 11.8 | 11.5 | |

Warranty: 5 years parts; 7 years compressor.

Art Cool™ Gallery

This air-conditioning system features a unique 20" x 20" indoor unit frame to display a photograph, picture, or artwork of your choice. Installation is simple—the units mount securely on a vertical surface with screws.





9,000 BTU/h

LA090HVP (Heat Pump)

© 9,000 BTU/h Cooling

H 10,800 BTU/h Heating

12,000 BTU/h

LA120HVP (Heat Pump)

- ©11,200 BTU/h Cooling
- H 13,300 BTU/h Heating



SPECIFICATIONS

* Specifications can be changed without notification

| System Model | LA090HVP | LA120HVP |
|------------------------|--------------------|-----------------|
| Indoor Model | LAN090HVP | LAN120HVP |
| Outdoor Model | LAU090HVP | LAU120HVP |
| Performance | | |
| Rated Capacity (BTU/h) | © 9,000 | (11,200 |
| | (1) 10,800 | H 13,300 |
| SEER | 16.0 | 16.0 |
| HSPF | 8.2 | 8.2 |

Warranty: 5 years parts; 7 years compressor.

Art Cool™Mirror

LG's Art Cool™ Mirror indoor units have a flat panel with a smoked charcoal mirror finish for a modern style. Choose from several operating settings in cooling or heating for customized comfort.







9,000 BTU/h

LA090HSV2 (Heat Pump)

- © 9,000 BTU/h Cooling
- H 10,800 BTU/h Heating

12,000 BTU/h

LA120HSV2 (Heat Pump)

- ©11,200 BTU/h Cooling
- H 13,300 BTU/h Heating

18,000 BTU/h

LA180HSV2 (Heat Pump)

- 18,200 BTU/h Cooling
- 1 22,000 BTU/h Heating

24,000 BTU/h

LA240HSV2 (Heat Pump)

- ©22,000 BTUs Cooling
- # 27,600 BTUs Heating





SPECIFICATIONS

 * Specifications can be changed without notification


| System Model | LA090HSV2 | LA120HSV2 | LA180HSV2 | LA240HSV2 |
|------------------------|-----------------|-----------------|-----------------|-----------------|
| Indoor Model | LAN090HSV2 | LAN120HSV2 | LAN180HSV2 | LAN240HSV2 |
| Outdoor Model | LAU090HSV2 | LAU120HSV2 | LAU180HSV2 | LAU240HSV2 |
| Performance | | | | |
| Rated Capacity (BTU/h) | © 9,000 | © 11,200 | © 18,200 | © 22,000 |
| | H 10,800 | 1 3,300 | H 22,000 | H 27,600 |
| SEER | 20.0 | 20.0 | 20.5 | 20.0 |
| HSPF | 11.0 | 11.0 | 9.7 | 10.0 |
| | | | | |

Warranty: 5 years parts; 7 years compressor.

High Efficiency Inverter

All systems in the Standard Inverter High Efficiency heat pump line (HSV3) achieve Energy Star qualifications, and are available in 3/4, 1, 1-1/2, and 2 ton capacities.







9,000 BTU/h

LS091HSV3 (Heat Pump)

- © 9,000 BTU/h Cooling
- 10,800 BTU/h Heating

SPECIFICATIONS

12,000 BTU/h

LS121HSV3 (Heat Pump)

- ©11,200 BTU/h Cooling
- 13,300 BTU/h Heating

18,000 BTU/h

LS181HSV3 (Heat Pump)

- 18,200 BTU/h Cooling
- # 22,000 BTU/h Heating

24,000 BTU/h

LS240HSV3 (Heat Pump)

- © 22,000 BTU/h Cooling
- # 27,600 BTU/h Heating





* Specifications can be changed without notification

| System Model | LS091HSV3 | LS121HSV3 | LS181HSV3 | LS240HSV3 |
|------------------------|-----------------|-----------------|-----------------|-----------------|
| Indoor Model | LSN091HSV3 | LSN121HSV3 | LSN181HSV3 | LSN240HSV3 |
| Outdoor Model | LSU091HSV3 | LSU121HSV3 | LSU181HSV3 | LSU240HSV3 |
| Performance | | | | · |
| Rated Capacity (BTU/h) | © 9,000 | (11,200 | (18,200 | © 22,000 |
| | H 10,800 | 1 3,300 | 1 22,000 | H 27,600 |
| SEER | 21.5 | 21.5 | 20.5 | 20.0 |
| HSPF | 11.0 | 11.0 | 9.7 | 10.2 |

Warranty: 5 years parts; 7 years compressor.

Standard Inverter

The Standard Inverter product line (HV3) is available in heat pump configurations with 30,000 and 36,000 Btu/h capacities—enough capacity to comfortably condition large rooms.





30,000 BTU/h

LS307HV3 (Heat Pump)

- 30,000 BTU/h Cooling
- H 32,000 BTU/h Heating

36,000 BTU/h

LS360HV3 (Heat Pump)

- @33,000 BTU/h Cooling
- 135,200 BTU/h Heating

SPECIFICATIONS

* Specifications can be changed without notification

| System Model | LS307HV3 | LS360HV3 | |
|------------------------|-----------------|-----------------|--|
| Indoor Model | LSN307HV3 | LSN360HV3 | |
| Outdoor Model | LSU307HV3 | LSU360HV3 | |
| Performance | | | |
| Rated Capacity (BTU/h) | 3 0,000 | © 33,000 | |
| | H 32,000 | H 35,200 | |
| SEER | 18.0 | 16.1 | |
| HSPF | 9.5 | 9.9 | |

Mega Wall-Mount

Mega Wall-Mount Split systems apply duct-free technology in a streamlined, low-profile design. Featuring an easier installation procedure and Inverter compressor technology, these systems are designed to save you time and money.









9,000 BTU/h

LS090HEV (Heat Pump)

- © 8,500 BTU/h Cooling
- 19,000 BTU/h Heating

12,000 BTU/h

LS120HEV (Heat Pump)

- ©12,000 BTU/h Cooling
- H 12,000 BTU/h Heating

18,000 BTU/h

LS180HEV (Heat Pump)

- © 17,000 BTU/h Cooling
- 19,000 BTU/h Heating

24,000 BTU/h

LS240HEV (Heat Pump)

- © 22,000 BTU/h Cooling
- 1 22,000 BTU/h Heating

SPECIFICATIONS

* Specification can be changed without notification

| System Model | LS090HEV | LS120HEV | LS180HEV | LS240HEV |
|------------------------|-------------------------------|-----------------|-----------------|-----------------|
| Indoor Model | LSN090HEV | LSN120HEV | LSN180HEV | LSN240HEV |
| Outdoor Model | LSU090HEV LSU120HEV LSU180HEV | | LSU240HEV | |
| Performance | | | | |
| Rated Capacity (BTU/h) | © 8,500 | © 12,000 | © 17,000 | © 22,000 |
| | H 9,000 | H 12,000 | H 19,000 | H 22,000 |
| SEER | 16.3 | 16.3 | 17.0 | 17.0 |
| HSPF | 8.3 | 8.5 | 8.7 | 8.5 |

Warranty: 5 years parts; 7 years compressor.

Four-Way Ceiling Cassette

LG's Four-Way Ceiling Cassette systems offer customized comfort with many user-adjustable settings. The indoor unit case is ceiling recessed, while the off-white architectural grille (required; sold separately) is flush mounted. These systems are best suited for large, open spaces.







LC187HV (Heat Pump)

- @ 18,000 BTU/h Cooling
- 1 20,000 BTU/h Heating

24,000 BTU/h

LC247HV (Heat Pump)

- © 24,000 BTU/h Cooling
- 1 27,000 BTU/h Heating





36,000 BTU/h

LC367HV (Heat Pump)

- 36,000 BTU/h Cooling
- H 40,000 BTU/h Heating

42,000 BTU/h

LC427HV (Heat Pump)

- © 42,000 BTU/h Cooling
- H 47,000 BTU/h Heating

SPECIFICATIONS

* Specifications can be changed without notification

| System Model | LC187HV | LC247HV | LC367HV | LC427HV |
|------------------------|-------------------|-----------------|-----------------|-----------------|
| Indoor Model | LCN187HV | LCN247HV | LCN367HV | LCN427HV |
| Outdoor Model | LUU187HV | LUU247HV | LUU367HV | LUU427HV |
| Performance | · | | | |
| Rated Capacity (BTU/h) | (a) 18,000 | 2 4,000 | 3 6,000 | Q 42,000 |
| | H 20,000 | H 27,000 | H 40,000 | H 47,000 |
| SEER | 20.0 | 17.0 | 19.0 | 17.0 |
| HSPF | 10.1 | 9.7 | 9.5 | 8.6 |

Warranty: 5 years parts; 7 years compressor

Ceiling-Concealed Duct (High Static)

LG's High Static Ducted split systems can be used in those rooms that require concealed installation. These systems are suited in light commercial applications or large, open spaces, and is a useful alternative when wall space is limited.



24,000 BTU/h

LH247HV (Heat Pump)

- © 24,000 BTU/h Cooling
- 1 27,000 BTU/h Heating



36,000 BTU/h

LH367HV (Heat Pump)

- 36,000 BTU/h Cooling
- # 40,000 BTU/h Heating

SPECIFICATIONS

* Specifications cans be changed without notification

| System Model | LH247HV | LH367HV | |
|------------------------|-----------------|-------------------|--|
| Indoor Model | LHN247HV | LHN367HV | |
| Outdoor Model | LUU247HV | LUU367HV | |
| Performance | | | |
| Rated Capacity (BTU/h) | © 24,000 | © 36,000 | |
| | H 27,000 | (1) 40,000 | |
| SEER | 17.0 | 17.6 | |
| HSPF | 10.0 | 9.2 | |



DUCT-FREE SPLIT : MULTI ZONE OUTDOOR UNITS

The more rooms the better with Multi F systems! One LG's Multi F Inverter heat pump outdoor unit can support either two, three, four, or eight indoor units that are typically installed in separate rooms. Compact refrigerant pipes work in tandem with wiring to link the outdoor unit to all indoor units either directly, or through a branch distribution (BD) unit (Multi F MAX systems only).

Outdoor Unit: Heat Pump Inverter

Dual-Zone Multi F LMU187HV

Mix and match for 9,000-24,000 BTU/h

LMU187HV (Heat Pump)

- © 15,600 BTU/h Cooling
- H 17,000 BTU/h Heating





Tri-Zone Multi F LMU247HV

Mix and match for 12,000-33,000 BTU/h

LMU247HV (Heat Pump)

- ©19,200 BTU/h Cooling
- #26,400 BTU/h Heating





Quad-Zone Multi F LMU369HV

Mix and match for 18,000-48,000 BTU/h

LMU369HV (Heat Pump)

- 34,000 BTU/h Cooling
- # 41,000 BTU/h Heating





Eight-Zone Multi F MAX LMU540HV

Mix and match for 27,000-73,000 BTU/h

LMU540HV (Heat Pump)

52,500 BTU/h Cooling 58,000 BTU/h Heating



SPECIFICATIONS

* Specifications can be changed without notification

| System Model | LMU187HV | LMU247HV | LMU369HV | LMU540HV |
|--|---------------------|---------------------|--------------------|--------------------|
| Performance | | | | |
| Rated Capacity (BTU/h) | © 15,600 | © 19,200 | © 34,000 | © 52,500 |
| | H 17,000 | H 26,400 | H 41,000 | H 58,000 |
| Min. to Max. No. of Connectable Indoor Units | 2 - 2 | 2 - 3 | 2 - 4 | 2 - 8 |
| SEER (Non-Ducted / Ducted & Non-Ducted) | 21.0 / 17.7 / 19.35 | 21.7 / 16.4 / 19.05 | 17.5 / 16.5 / 17.0 | 18.4 / 15.8 / 17.1 |
| HSPF (Non-Ducted / Ducted & Non-Ducted) | 9.2 / 8.8 / 9.0 | 9.4 / 8.5 / 8.95 | 10.5 / 9.5 / 10.0 | 8.7 / 8.0 / 8.35 |

Warranty: 2 years parts; 5 years compressor.

Warranty: 5 years parts; 7 years compressor.



DUCT-FREE SPLIT : MULTI ZONE INDOOR UNITS

Mix and match Multi F indoor units for customized comfort. All Multi F indoor units include a remote control, and many styles are offered: Art Cool™ Mirror wall-mounted, Art Cool™ Gallery wall-mounted, standard wall-mounted, four-way ceiling cassettes, ceiling-concealed duct (high and low static), and vertical-horizontal air handling models.

Art Cool™ Gallery Inverter

Available in 9,000 and 12,000 Btu/h, the slim, contemporary styling of the Art Cool™ Gallery models will appeal to today's discerning customer.

9,000 BTU/h 11,200 BTU/h LMAN097HVP LMAN127HVP





SPECIFICATIONS

* Specifications can be changed without notification

| Indoor Unit Model Number | | LMAN097HVP | LMAN127HVP |
|-----------------------------------|-----------|-----------------|--------------|
| Performance | | | |
| Rated Cooling Capacity | BTU/h | 9,000 | 11,200 |
| Rated Heating Capacity | BTU/h | 10,400 | 13,300 |
| Fan Airflow Rate (H / M / L) | CFM | 272 / 208 / 155 | 314/258/198 |
| Sound Pressure Levels (H / M / L) | dB(A)+/-3 | 39 / 35 / 31 | 42 / 38 / 34 |

Warranty: 5 years parts.

Art Cool™ Mirror

Wall-mounted indoor units with a mirror-finished front panel. Choose from 9,000, 12,000, and 18,000 Btu/h capacities.

9,000 BTU/h

LMAN097HVT



LMAN127HVT

18,000 BTU/h LMAN187HVT

SPECIFICATIONS

* Specifications can be changed without notification

| Indoor Unit Model Number | | LMAN097HVT | LMAN127HVT | LMAN187HVT |
|-----------------------------------|-----------|-----------------|-----------------|-----------------|
| Performance | | | | |
| Rated Cooling Capacity | BTU/h | 9,000 | 12,000 | 18,000 |
| Rated Heating Capacity | BTU/h | 10,400 | 13,800 | 20,800 |
| Fan Airflow Rate (H / M / L) | CFM | 247 / 230 / 212 | 335 / 318 / 300 | 572 / 501 / 434 |
| Sound Pressure Levels (H / M / L) | dB(A)+/-3 | 33 / 30 / 27 | 39 / 36 / 31 | 37 / 33 / 28 |

Warranty: 5 years parts.

Standard Wall-Mount

Wall-mounted indoor units with a white exterior. Available in 9,000, 12,000, and 18,000 Btu/h capacities.





9.000 BTU/h

12,000 BTU/h

LMN127HVT

18,000 BTU/h

LMN187HVT

SPECIFICATIONS

LMN097HVT

* Specifications can be changed without notification

| Indoor Unit Model Number | door Unit Model Number | | LMN127HVT | LMN187HVT | |
|-----------------------------------|------------------------|-----------------|--------------|-----------------|--|
| Performance | | | | | |
| Rated Cooling Capacity | BTU/h | 9,000 | 12,000 | 18,000 | |
| Rated Heating Capacity | BTU/h | 10,400 | 13,800 | 20,800 | |
| Fan Airflow Rate (H / M / L) | CFM | 247 / 230 / 212 | 335/318/300 | 572 / 501 / 434 | |
| Sound Pressure Levels (H / M / L) | dB(A)+/-3 | 33 / 30 / 27 | 39 / 36 / 31 | 37 / 33 / 28 | |

Ceiling Concealed Duct (Low Static)

LG's Multi F Ceiling-Concealed Duct (Low Static) indoor units are designed for low-static pressure applications up to 0.16"WG. With a maximum height of 7-1/2 inches, these units can be mounted fully concealed above a finished ceiling with as little as 8 inches of vertical space.





9,000 BTU/h

12,000 BTU/h

18,000 BTU/h

LMDN095HV

LMDN125HV

LMDN185HV

SPECIFICATIONS

* Specifications can be changed without notification

| Indoor Unit Model Number | | LMDN095HV | LMDN125HV | LMDN185HV |
|-----------------------------------|-----------|-----------------|-----------------|-----------------|
| Performance | | | | |
| Rated Cooling Capacity | BTU/h | 9,000 | 12,000 | 18,000 |
| Rated Heating Capacity | BTU/h | 10,400 | 13,800 | 20,800 |
| Fan Airflow Rate (H / M / L) | CFM | 300 / 265 / 229 | 335 / 300 / 265 | 530 / 477 / 406 |
| Max. External Static Pressure | in. WG | 0.16 | 0.16 | 0.16 |
| Sound Pressure Levels (H / M / L) | dB(A)+/-3 | 32 / 26 / 25 | 33 / 31 / 26 | 34 / 31 / 29 |

Warranty: 5 years parts.

Ceiling Concealed Duct (High Static)

LG's Multi F Ceiling-Concealed Duct (High Static) indoor units are designed for high-speed air volume against an external static pressure up to 0.78"WG for the 24,000 Btu/h model; up to 0.55"WG for the 36,000 Btu/h model.





24,000 BTU/h

36,000 BTU/h

LMHN240HV

LMHN360HV

SPECIFICATIONS

* Specifications can be changed without notification

Warranty: 5 years parts.

Four-Way Ceiling Cassette

Four-way cassette indoor units have a supply air outlet with four-directional diffusers, each equipped with an independent motorized guide vane to provide four-way airflow. The unit case recesses into the ceiling, while the grille (required; sold separately) flush mounts to the ceiling.



12,000 BTU/h LMCN125HV 18,000 BTU/h LMCN185HV

SPECIFICATIONS

* Specifications can be changed without notification

| Indoor Unit Model Number | | LMCN125HV | LMCN185HV | |
|--|-----------|-----------------|-----------------|--|
| eiling Grille Model Number (Sold Separately) | | PT-UQC | PT-UQC | |
| Performance | | | | |
| Rated Cooling Capacity | BTU/h | 12,000 | 18,000 | |
| Rated Heating Capacity | BTU/h | 13,800 | 20,800 | |
| Fan Airflow Rate (H / M / L) | CFM | 335 / 283 / 247 | 459 / 424 / 388 | |
| Sound Pressure Levels (H / M / L) | dB(A)+/-3 | 38 / 35 / 32 | 38 / 37 / 34 | |

Warranty: 5 years parts.

Vertical-Horizontal Air Handling Unit

LG's Multi F Vertical-Horizontal Air Handling units are designed for high-speed air volume applications. These units are installed fully concealed behind a wall or above a finished ceiling, and can operate either in a vertical (upflow) or horizontal (left) discharge configuration.

24,000 BTU/h LMVN240HV 36,000 BTU/h LMVN360HV



SPECIFICATIONS

* Specifications can be changed without notification

| ndoor Unit Model Number | | LMVN240HV | LMVN360HV |
|-----------------------------------|-----------|-----------------|-----------------|
| Performance | | | |
| Rated Cooling Capacity | BTU/h | 24,000 | 36,000 |
| Rated Heating Capacity | BTU/h | 27,000 | 40,000 |
| Fan Airflow Rate (H / M / L) | CFM | 710 / 640 / 480 | 990 / 880 / 800 |
| Sound Pressure Levels (H / M / L) | dB(A)+/-3 | 43 / 42 / 41 | 45 / 44 / 43 |

Warranty: 5 years parts.

FEATURES

| Single-Zon | ne Systems | Art Cool ™ Gallery | Art Cool ™ Premier | Art Cool ™ Mirror | Mega | High Efficiency Inverter | Standard Inverter | Four- VVay Cassette | Duct (High Static) |
|--|---|--------------------------|--------------------------|------------------------|----------|--------------------------------|----------------------|---------------------------|--------------------------|
| Energy Star Most Efficient | Most Efficient 2014 ENERGY STAR WWW.energystacgov | | √ | (except for LA240HSV2) | | ✓ | | | |
| Energy Star | Energy STAR | √ | √ | (except for LA240HSV2) | | √ | | | |
| Gold Fin [™] Anti- Corrosion | € GOTD | √ | √ | √ | √ | √ | √ | √ | √ |
| Self-cleaning indoor coil | | √ | √ | ✓ | √ | √ | √ | | |
| Jet Cool | * | √ | √ | √ | √ | √ | √ | √ | |
| Jet Heat | * | ✓ | √ | ✓ | | √ | √ | | |
| 4-Way auto swing | ₹ | √ | √ | ✓ | | √ | | | |
| Ultra quiet operation | 1 | ✓ | √ | ✓ | √ | √ | √ | √ | √ |
| Sleep mode | z ^z | ✓ | √ | ✓ | √ | ✓ | √ | √ | √ |
| Auto restart | | ✓ | ✓ | ✓ | √ | ✓ | √ | √ | √ |
| Auto changeover | No. | ✓ | √ | √ | √ | √ | √ | √ | √ |
| Built-in low ambient standard, down to 14°F (Cooling Mode) | * | √ | √ | √ | | √ | √ | √ | |
| Condensate sensor connection | \(\cdot\) | ✓ | ✓ | ✓ | √ | ✓ | ✓ | | |
| Internal condensate pump included | | | | | | | | √ | √ |
| 3M™ HAF filter | MiCRO Dust Filter Powered by 3M Tech | | | | | √ | √ | | |
| Cool only function | * | | ✓ | | | √ | √ | | |
| | 5 years parts; 7 years compressor | √ | √ | √ | √ | √ | √ | √ | √ |
| Warranty | 2 years parts; 5 years compressor | | | | | | | | |
| | 5 years parts | | | | | | | | |

| Multi-Zone Outdoor U | e Systems— nits | Dual-Zone Multi F LMU187HV | Tri-Zone Multi F LMU247HV | Quad-Zone Multi F LMU369HV | Eight-Zone Multi F MAX LMU540HV |
|--|--|-------------------------------|------------------------------|-------------------------------|------------------------------------|
| Energy Star Most Efficient | Most Efficient 2014 ENERGY STAR WWW.energystar.gov | | | | |
| Energy Star | ENERGY STAR | √ | √ | ✓ | |
| Gold Fin [™] Anti- Corrosion | S S S S S S S S S S S S S S S S S S S | √ | √ | ✓ | √ |
| Self-cleaning indoor coil | | | | | |
| Jet Cool | * | | | | |
| Jet Heat | * | | | | |
| 4-Way auto swing | + | | | | |
| Ultra quiet operation | 4 | | | | |
| Sleep mode | z ^Z | | | | |
| Auto restart | | √ | √ | ✓ | ✓ |
| Auto changeover | K | | | | |
| Built-in low ambient standard, down to 14°F (Cooling Mode) | * | √ | √ | √ | ✓ |
| Condensate sensor connection | \(\) | | | | |
| Internal condensate pump included | \(\) | | | | |
| 3M™ HAF filter | MICRO Dust Filter Powered by 3M Tech | | | | |
| Cool only function | * | | | | |
| | 5 years parts; 7 years compressor | | | | √ |
| Warranty | 2 years parts; 5 years compressor | √ | √ | √ | |
| | 5 years parts | | | | |

| | | | | | Indoor Uni | ts | | |
|--|--|--------------------------|-------------------------|----------------------------|-------------------------|--------------------------|----------------------|--|
| Multi-Zone Indoor Uni | e Systems— ts | Art Cool ™ Gallery | Art Cool ™ Mirror | Standard Wall- Mount | Duct (Low Static) | Duct (High Static) | Four-Way Cassette | Vertical- Horizontal Air Handler |
| Energy Star Most Efficient | Most Efficient 2014 ENERGY STAR | Cancry | | | Staticy | Staticy | | |
| Energy Star | energy STAR | √ | √ | √ | | | | |
| Gold Fin [™] Anti- Corrosion | © GOTD | | | | | | | |
| Self-cleaning indoor coil | | √ | √ | √ | | | | |
| Jet Cool | | √ | √ | √ | | | √ | |
| Jet Heat | * | √ | √ | √ | | | | |
| 4-Way auto swing | + | √ | √ | √ | | | | |
| Ultra quiet operation | 1 | √ | √ | √ | √ | √ | √ | √ |
| Sleep mode | z ^z | √ | √ | √ | | ✓ | √ | ✓ |
| Auto restart | | √ | √ | √ | √ | √ | √ | √ |
| Auto changeover | K | | | | | | | |
| Built-in low ambient standard, down to 14°F (Cooling Mode) | * | | | | | | | |
| Condensate sensor connection | \(\) | √ | √ | √ | | | | |
| Internal condensate pump included | \(\) | | | | ✓ | ✓ | ✓ | |
| 3M™ HAF filter | MÍCRO Dust Filter Powered by 3M Tech | | | | | | | |
| Cool only function | * | | | | | | | |
| | 5 years parts; 7 years compressor | | | | | | | |
| Warranty | 2 years parts; 5 years compressor | | | | | | | |
| | 5 years parts | \checkmark | √ | ✓ | √ | \checkmark | ✓ | |

| FOR MORE INFORMATION, VISIT WWW.LG-DFS.COM OR WWW.LGHVAC.COM. |
|---|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| DUCT-FREE AIR CONDITIONERS |
| LG INTERNET SALES POLICY |
| Duct-Free Air Conditioning Products |
| |
| LG's expressed Duct-Free Air Conditioning warranty policy applies only to products sold and installed by qualified air conditioning contractors. |
| Because products sold via the Internet cannot be assured of quality installation by a qualified air conditioning contractor, LG's expressed warranty may not apply to internet sales. |
| LG supports and recommends that a qualified air conditioning contractor properly size and install all LG Duct-Free Air Conditioning products for optimal performance and long life. |





Visit www.lg-dfs.com or www.lghvac.com

Our sites are excellent resources for information, and it's where you'll can find LG Trained Contractors that service your area.

LG Electronics U.S.A., Inc. HVAC Division 11405 Old Roswell Road, Alpharetta, GA 30009