

Gas Condensing Technology

VITODENS® 222-F, B2TA

VIESSMANN®
climate of innovation®




Gas Condensing Technology

Vitodens 222-F, B2TA – 12 to 125 MBH Gas-fired floor standing condensing technology and compact solution for DHW



The Vitodens 222-F is ENERGY STAR® qualified and EcoLogo™ certified.



Advanced Storage Tank Loading System (STLS) ensures an extremely fast heat-up

Smart, compact space heating and DHW

The new Vitodens 222-F, B2TA gas-fired condensing boiler is an ideal space-saving option for new installations and a smart upgrade for outdated boiler and domestic hot water (DHW) storage systems. The floor standing Vitodens 222-F is available in two input sizes, offering compact, economical space heating and DHW solutions for homes with moderate heating loads.


Innovative Storage Tank Loading System (STLS)

Advanced Storage Tank Loading System technology in the Vitodens 222-F ensures a reliable and efficient DHW supply equivalent to that of a larger tank. The STLS utilizes an external plate heat exchanger and DHW loading pump for extremely fast heat-up capable of delivering a 10-minute peak flow of 60 gallons (model B2TA-35 only) or continuous DHW draw of 3.3 GPM*.

New! Award winning control unit

The intuitive Viessmann-made Vitotronic 200, HO1B control manages the entire heating system and maintains economical performance and maximum comfort at all times. The user-friendly, menu-driven control is capable of displaying multi-line text and graphics on a backlit display 70% larger than those of comparable units. The high-contrast, monochrome display offers excellent readability, even under poor lighting conditions.

An outdoor reset function automatically adapts the boiler operating temperature to the changing outdoor temperature. This reduces fuel consumption up to 15%, giving you excellent returns year after year on a modest initial investment. Plus, with system control for multiple zone space and DHW heating, the Vitotronic 200, HO1B offers even greater heating flexibility without additional external controls.

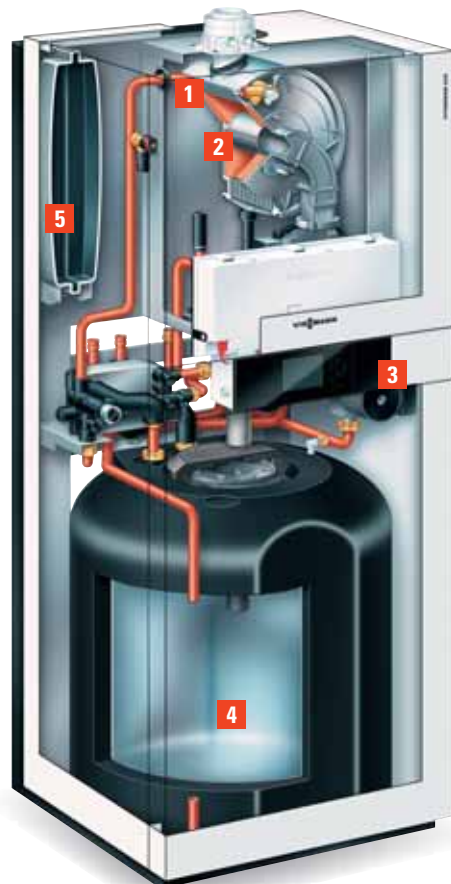


New! Intuitive Vitotronic 200 control with graphic user interface

- 1 Inox-Radial heat exchanger
- 2 Modulating MatriX cylinder burner
- 3 Vitotronic 200 control with graphic user interface
- 4 Stainless steel storage tank
- 5 Heating expansion tank



Stainless steel, Viessmann-made
Inox-Radial heat exchanger



Low-emission, Viessmann-made
MatriX cylinder burner

Proven Viessmann technology

At the heart of the new Vitodens 222-F are the Viessmann-made SA240 316Ti stainless steel Inox-Radial heat exchanger and low-emission MatriX cylinder burner. The MatriX burner's Lambda Pro combustion management system automatically adapts to changing gas type and quality for optimal efficiency, while the durable stainless steel heat exchanger offers exceptional reliability and long service life. Together, they allow for optimal heat extraction with minimal heat loss to maximize energy utilization and reduce fuel consumption.

Specifications

- Viessmann-made SA240 316Ti stainless steel Inox-Radial heat exchanger constructed to CSA B51 and ASME Section IV
- Viessmann-made stainless steel MatriX cylinder burner with Lambda Pro combustion management system for continuous efficiency and low emissions
- 2 models with input ranges from 12 to 125 MBH
- Viessmann-made SA240 316Ti stainless steel DHW storage tank (26 USG)
- Innovative DHW Storage Tank Loading System comprised of plate heat exchanger, DHW loading pump and storage tank
- Zero side clearance requirement
- Pre-installed pressure / temperature relief valves
- Fully enclosed heating expansion tank and circulation pump
- Exceeds Energy Star® Efficiency Requirements
- Built-in 3-speed DHW / space heating pump with diverter valve
- Suitable for altitude levels up to 10,000 ft. / 3,000 m
- Fast heat-up with Storage Tank Loading System
- 10-minute peak flow of 60 gallons (model B2TA-35 only)*
- Continuous DHW draw of 3.3 GPM*
- Wide modulation ratio up to 6.5:1
- Multiple venting options with vent length up to 180 ft.

* Based on a temperature rise of 70 °F (50 °F to 120 °F).

Viessmann Manufacturing
Company Inc.
Waterloo, ON Canada
1-800-387-7373
www.viessmann.ca

Viessmann Manufacturing
Company (U.S.) Inc.
Warwick, RI U.S.A.
1-800-288-0667
www.viessmann.us

Technical Data



Vitodens 222-F, B2TA gas-fired floor standing condensing boiler and DHW heating system

| | | | |
|--|------|-----------|-----------|
| Model | B2TA | 19 | 35 |
| Min. Input | MBH | 12 | 19 |
| Max. Input | MBH | 67 | 125 |
| Max. Allowable Working Pressure | psig | 45 | 45 |
| Dimension | | | |
| Width | in. | 23.5 | 23.5 |
| Height | in. | 65.5 | 65.5 |
| Depth | in. | 23.5 | 23.5 |
| DHW Storage Tank | | | |
| Capacity | USG | 26.5 | 26.5 |
| Max. Allowable Working Pressure | psig | 150 | 150 |
| Continuous Draw Rate* | gpm | 1.8 | 3.3 |
| Max. Draw Rate* (over 10 min. period) | gal | 44 | 60 |
| Weight | lbs | 313 | 313 |

* Based on a temperature rise of 70 °F (50 °F to 120 °F).
Information subject to change without notice.

